



## **Niveo Professional NWA350**

**Wave 2.0 2200Mbps tri-band Manageable PoE Ceiling Wireless AP**



## Description

The NWA350 is a Wave 2.0 2200Mbps Tri-Band Manageable Enterprise Ceiling Wireless Access Point with the next generation 802.11ac MU-MIMO Wave 2.0 Technology, 2.4Ghz & 5G Tri-Band with a full 360degrees Wi-Fi coverage.

## Adjustable RF Power

The NWA350 can easily adjust its RF power for large-scale deployment.

## Power over Ethernet

The NWA350 comes with integrated IEEE802.3at Power over Ethernet (PoE), for easy installation and eliminating the mess of altering existing network infrastructure.


## Access Controller System & Cloud Management System

The NWA350 can work as either a FIT or FAT AP. Use FIT AP mode to work with the Niveo Professional NRS-RC1 controller, or work as a standalone AP or together with Niveo Professional NWAC7000 Access Control System, for easy advanced remote network settings, like AP status monitor, change IP address, ESSID, Channel, Password, upgrade firmware, multi authentication, backup and restore. The NWA350 can also be easily monitored, located and accessed using the Niveo Cloud Management System.



## More Wi-Fi Coverage

The SKYworks Power Amplifier and Low Noise Amplifier design creates a wide wireless coverage and reduces noise interference

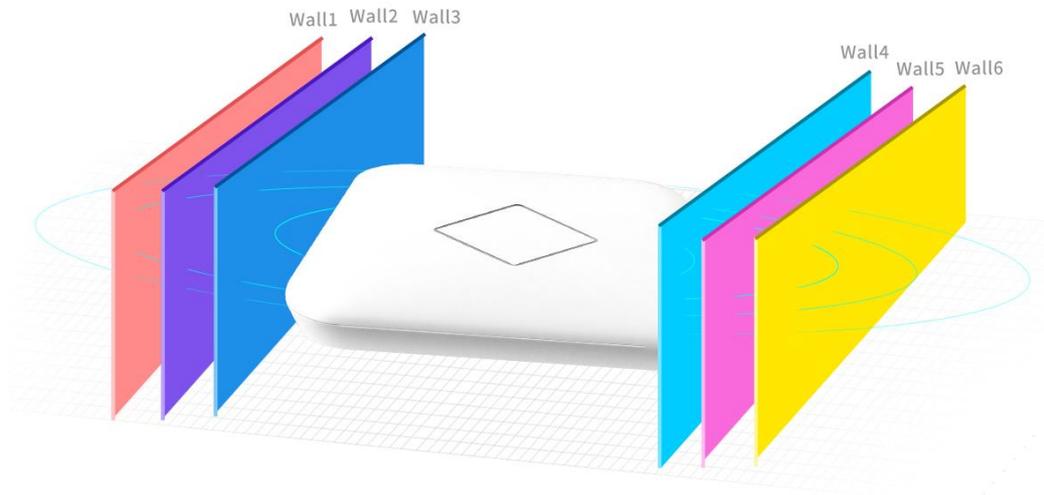

## Adjustable RF Power to improve wireless quality


The transmission RF power is adjustable based on the installation environment. Cut down RF power in places with high density of people or closed ranged APs to reduce Wi-Fi interference. Increase RF power in larger areas to improve signal strength.





## Seamless Roaming, no loss in Wi-Fi connection

End users will connect to the wireless AP with the strongest wireless signal to achieve seamless roaming.

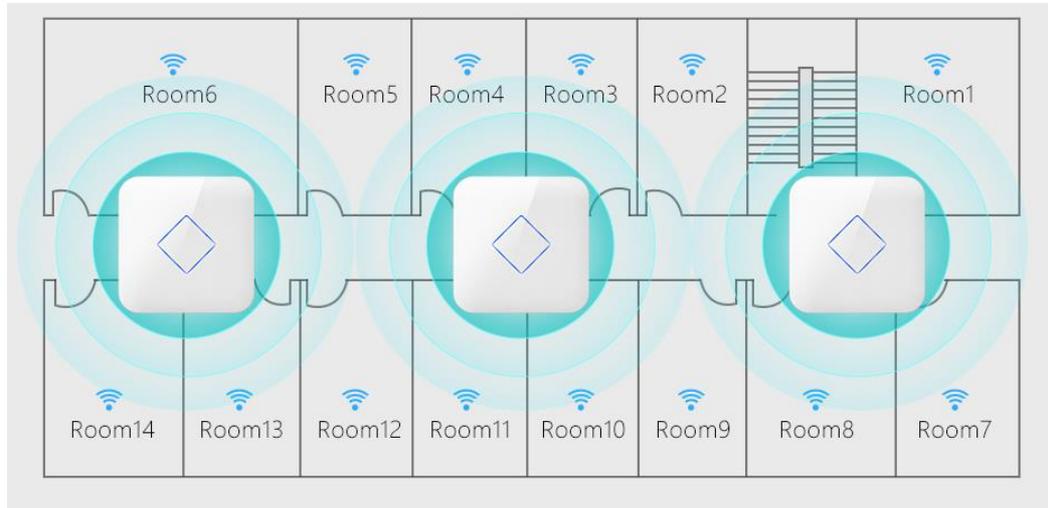

## 2.4Ghz +5Ghz+5Ghz Tri-band, less Frequency Interference

2200Mbps data rate, 256 end users simultaneous

